
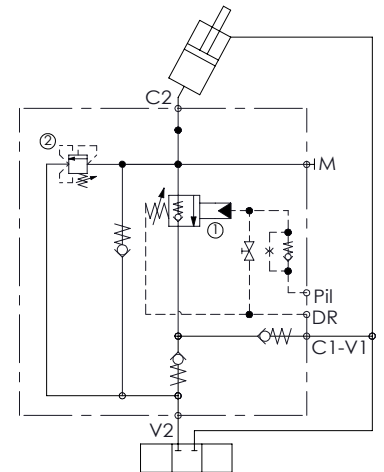



EXCAVATORS VALVE

**MLST-160-RLGR**

WITH OIL RECOVERY

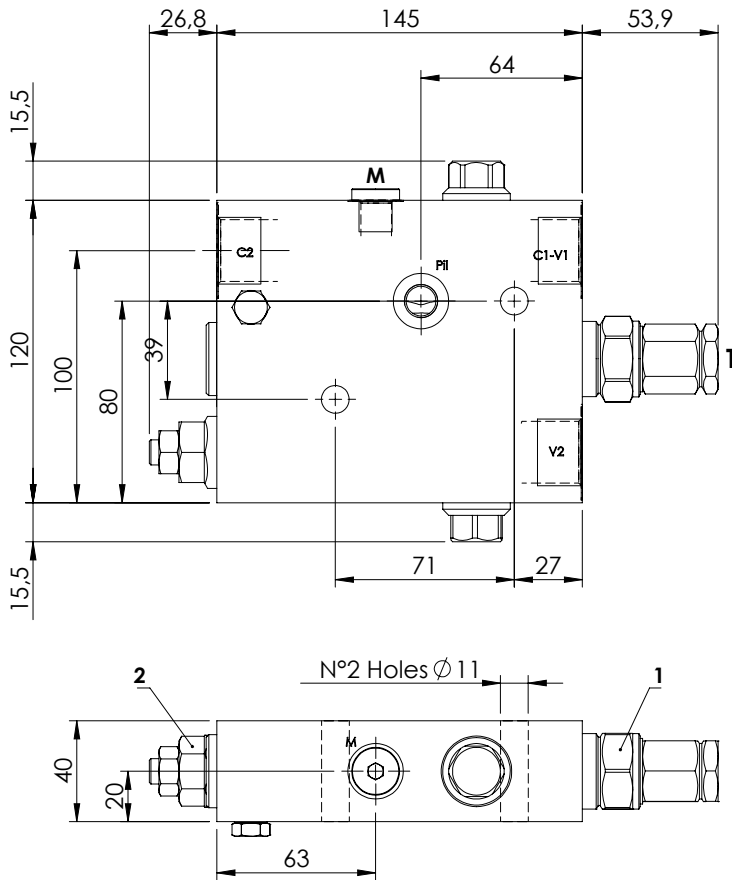


**SPECIFICATIONS**

Max. operating pressure:	420 bar
Rated flow:	160 l/min
Manifold:	Steel
Weight:	5,01 kg

**NOTES**

When correctly adjusted for the specific excavator installation, these valves meet the requirement of ISO 8643

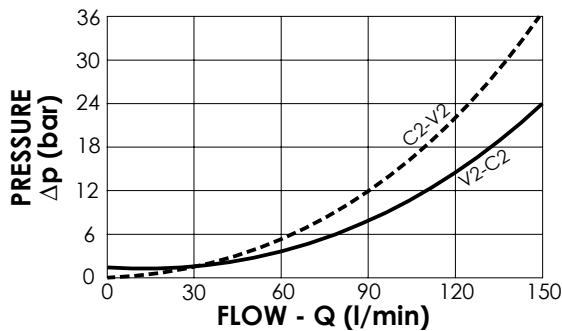

**ORDERING CODES**

Quick code	Description	Main ports size	Standard setting (bar)	Adjust. range (bar)	Pressure increase (bar/turn)
ML000165	MLST-160-RLGR-00-G34-N420	V2,C2: G 3/4" P11,T,M: G 1/4"	① 350 Q=5 l/min ② 7.5 Crack. pr.	① 350-400 ② 3-15	① 72 ② 8